Series
VENTS KSB



Inline centrifugal fans in heat- and sound-insulated casing with the air capacity up to **2150 m³/h**

Applications
KSB fan design enables its application in supply and exhaust ventilation systems for the premises with high requirements to noise level and limited mounting space. Provision is made for installation in a premise above the suspended ceiling. Suitable for connection with 100, 125, 150, 160, 200, 250 and 315 mm round ducts.

Design
The fan casing is made of galvanized steel sheet and provided with heat- and sound-insulating material. Round connecting pipes are fitted with rubber seals.

Motor
The centrifugal impeller with backward curved blades is powered by means of 2-pole asynchronous motor with external rotor. The motors are equipped with built-in thermal overheating protection with automatic restart. Motor ball bearings with selective lubricating oil ensure low-noise and maintenance-free fan operation. KSB...M model motor is installed onto the rubber anti-vibration mounts to reduce vibration and noise. Models marked KSB...S are featured with the high-powered motors.

Speed control
Smooth or step speed control with a thyristor or autotransformer speed controller. Several fans may be connected to one speed controller provided that the total power and operating current do not exceed the rated speed controller parameters.

Mounting
The fans are designed for inline mounting inside an air duct of matching air duct diameter, in any point of the ventilation system and at any angle. The fan shall be fixed to a building by means of supports, suspension brackets or fixation brackets in case of flexible connectors application. The fan can be mounted in any position with respect to the air flow direction indicated with a pointer on the fan casing. Access to the fan maintenance shall be provided.

Designation key:

Series	Spigot diameter	Options
VENTS KSB	100; 125; 150; 160; 200; 250; 315	**R** – power cord with IEC C14 electric plug. **S** – high-powered motor. **M** – anti-vibration mount. **U** – speed controller with electronic thermostat and temperature sensor integrated into the air duct. Equipped with power cord and IEC C14 electric plug. Temperature-based operation logic. **Un** – speed controller with electronic thermostat and external temperature sensor fixed on 4 m cable. Equipped with power cord and IEC C14 electric plug. Temperature-based operation logic. **U1** – speed controller with electronic thermostat and temperature sensor integrated into the air duct. Equipped with power cord and IEC C14 electric plug. Timer-based operation logic. **U1n** – speed controller with electronic thermostat and external temperature sensor fixed on 4 m cable. Equipped with power cord and IEC C14 electric plug. Timer-based operation logic.

Accessories



page 378 page 386 page 388 page 392 page406 page 442 page 446 page 461 page 462 page 476 page 477 page 480

The fan with electronic temperature and control module (U option).

The ideal solution for ventilation of the premises requiring permanent temperature control, i.e. greenhouses. The fan with the electronic temperature and speed control module provides automatic control of the motor speed (air capacity) depending on air temperature in the air duct or in the room.

The fan front panel has the following control knobs:

– speed control knob for setting the motor speed;

– thermostat control knob for setting the temperature set point;

– thermostat indicator light.

The fan is available in two modifications:

– with the temperature sensor integrated inside the fan air duct (U/U1 option);

– with the external temperature sensor fixed on the cable, 4 m long (Un / U1n).

Control logic of the fan with the electronic temperature and speed control module

Set the desired air temperature (thermostat set point) by turning the thermostat control knob. Set the required minimum impeller speed (air flow) by turning the speed control knob. The motor switches to maximum speed (maximum air flow) as the temperature reaches and exceeds the set temperature set point. The motor switches to the pre-set lower speed as the temperature drops down below the temperature set point. To avoid frequent motor speed switches when the air temperature in the duct is equal to the set temperature point, the speed switch delay is activated. There are two switch delay patterns for various cases:

1. The temperature sensor-based switch delay (U option): the motor switches to higher speed as the air temperature exceeds 2 °C above the set thermostat set point. The motor revers to the preset lower speed as the air temperature drops below the thermostat set point. This pattern is used to keep air temperature to within 2 °C. In this case the motor speed switches are rare.

2. The timer-based switch delay (U1 option): as the air temperature exceeds the set thermostat set point, the motor switches to higher speed and the switch delay timer is activated for 5 min. The motor reverts to lower speed as the air temperature drops down below the thermostat set point and only after 5 minuts timer countdown.

This pattern is used for exact air temperature control. The speed switches for the fan with U1 option are more frequent as compared to the operating logic of the fan with U option, however the minimum operating cycle at one speed is 5 minutes.

Example for temperature sensor delay:

Initial conditions:

• rated speed is set as 60% of the maximum speed

• operating threshold is set as 25 °C

• air temperature in the duct is 20 °C

Fan operates with the rated speed =60%

▼

• air temperature in the duct rises

fan operates with the rated speed =60%

▼

• air temperature in the duct reaches 27 °C

Fan switches to the speed =100%

▼

• air temperature in the duct goes down

fan operates with the speed =100%

▼

• temperature in the duct reaches 25 °C again

fan switches to the preset rated speed =60%

Example for timer delay:

Initial conditions:

• set rotation speed = 60% of maximum speed

• set operating threshold =25 °C

• air temperature in the duct =20 °C

motor operates with the motor speed =60%

▼

• the temperature in the duct rises, reaches 25 °C and keeps rising

▼

fan switches to the maximum speed =100% and the delay timer switches for 5 minutes on

▼

• the temperature in the duct goes down

the fan operates with the maximum speed =100%

▼

• the temperature in the duct reaches 25 °C and keeps going down

▼

after the timer stops, the motor switches to the preset rated speed (=60%). After the speed switch the timer switches again for 5 minutes on.

▼

• the temperature in the duct rises, reaches 25 °C and keeps rising

▼

after the timer stops, the motor switches to the maximum speed (=100%). After the speed switch the timer switches again for 5 minutes on.

Thus, in timer delay pattern the delay timer activates every time the fan speed changes.

Fan overall dimensions:

Type	Dimensions [mm]							Weight [kg]
	ØD	B	B1	H	L	L1	L2	
KSB 100	99	322	280	192	447	380	350	5.4
KSB 125	124	322	280	192	447	380	350	5.4
KSB 150	149	352	310	212	477	410	380	6.4
KSB 160	159	352	310	212	477	410	380	6.4
KSB 200	199	432	368	287	588	506	480	10.0
KSB 200 S	199	432	368	287	588	506	480	12.0
KSB 250	249	432	368	287	588	506	480	12.5
KSB 315	314	502	438	397	648	566	540	15.5

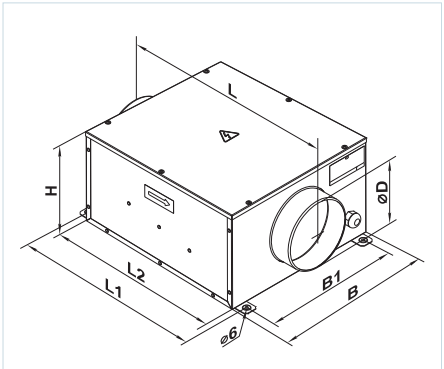

Technical data:

	KSB 100	KSB 125	KSB 150	KSB 160
Voltage [V / 50 Hz]	230	230	230	230
Power [W]	73	73	72	75
Current [A]	0.32	0.32	0.32	0.33
Max. air capacity [m^3/h]	240	330	420	420
RPM [min^{-1}]	2560	2590	2600	2690
Noise level at 3 m [dBA]	33	35	36	36
Transported air temperature [°C]	-25 +55	-25 +55	-25 +55	-25 +55
SEC class	C	C	C	C
Protection rating	IP X4	IP X4	IP X4	IP X4

VENTS KSB

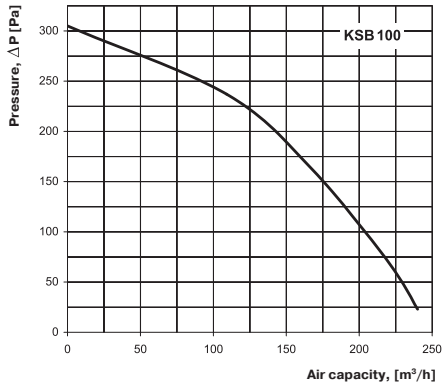

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
L_{wA} to inlet	dBA	59	53	57	54	52	51	54	51	47
L_{wA} to outlet	dBA	68	49	50	53	56	66	63	56	54
L_{wA} to environment	dBA	40	27	29	32	31	34	29	29	20

VENTS KSB

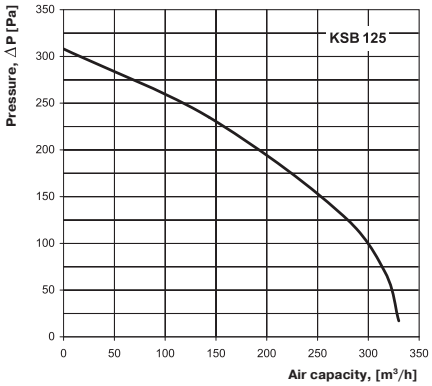

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
L_{wA} to inlet	dBA	64	51	51	54	56	54	55	53	51
L_{wA} to outlet	dBA	65	50	49	59	55	61	61	58	51
L_{wA} to environment	dBA	38	29	32	33	33	33	31	28	25

VENTS KSB

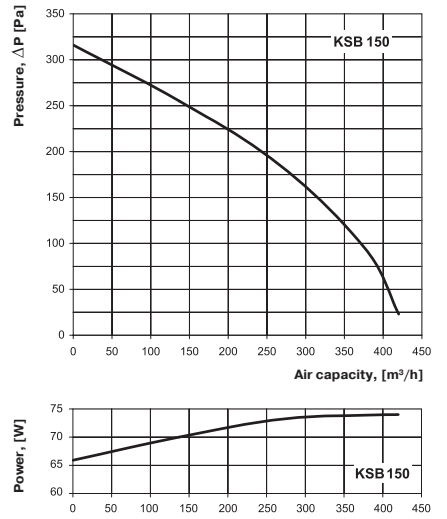

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
L_{wA} to inlet	dBA	62	49	50	58	56	54	55	52	50
L_{wA} to outlet	dBA	66	43	44	59	55	62	60	55	53
L_{wA} to environment	dBA	41	26	30	35	34	34	30	26	25

VENTS KSB

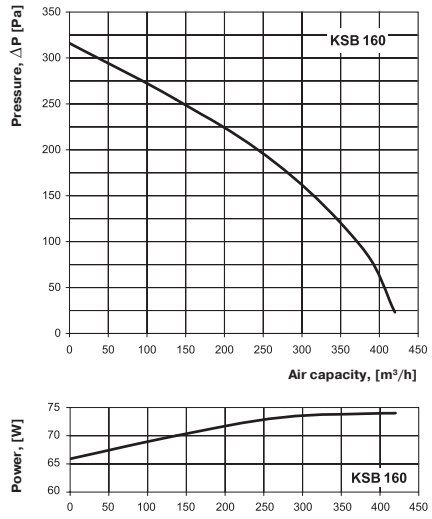

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
L_{wA} to inlet	dBA	62	50	51	60	56	52	55	54	51
L_{wA} to outlet	dBA	68	48	47	57	60	67	63	59	56
L_{wA} to environment	dBA	41	28	26	32	33	36	34	25	23

Technical data:

	KSB 200	KSB 200 S	KSB 250	KSB 315
Voltage [V / 50 Hz]	230	230	230	230
Power [W]	103	195	198	322
Current [A]	0.45	0.85	0.87	1.40
Max. air capacity [m^3/h]	730	950	1300	2150
RPM [min^{-1}]	2550	2570	2420	2670
Noise level at 3 m [dBA]	38	41	41	43
Transported air temperature [°C]	-25 +50	-25 +45	-25 +50	-25 +45
SEC class*	B	B	-	-
Protection rating	IP X4	IP X4	IP X4	IP X4

* The EC norm 1254/2014 does not apply if maximum air capacity is >1000 m3/h

VENTS KSB

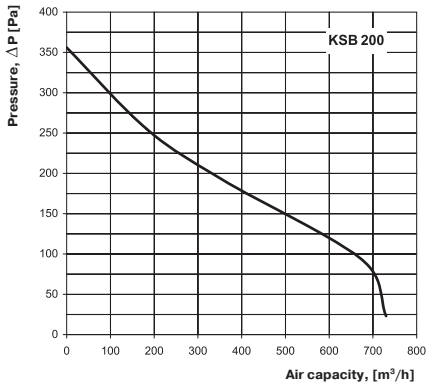

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
L_{wA} to inlet	dBA	52	37	38	45	45	39	39	36	26
L_{wA} to outlet	dBA	67	49	46	55	64	59	60	53	41
L_{wA} to environment	dBA	43	33	35	33	38	25	31	25	25

VENTS KSB

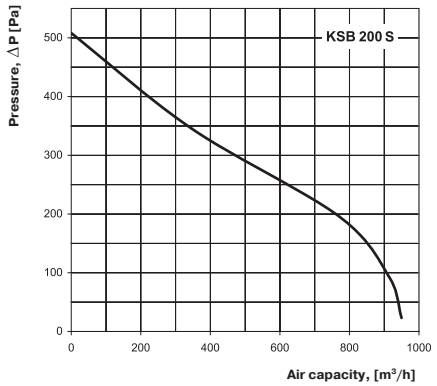

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
L_{wA} to inlet	dBA	53	41	43	53	51	47	44	44	36
L_{wA} to outlet	dBA	70	48	49	57	68	65	63	58	51
L_{wA} to environment	dBA	45	29	32	37	40	27	29	26	27

VENTS KSB

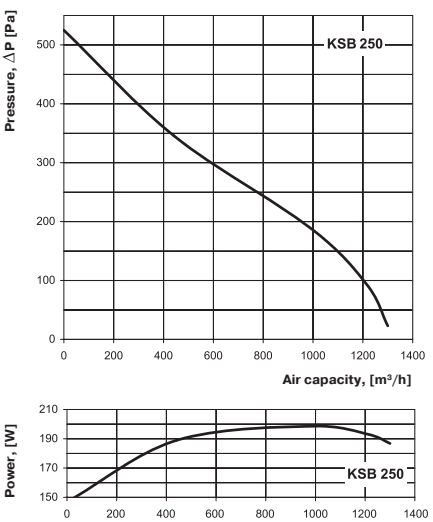

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
L_{wA} to inlet	dBA	59	44	45	54	51	47	45	45	38
L_{wA} to outlet	dBA	74	51	51	62	70	67	64	61	55
L_{wA} to environment	dBA	46	33	36	41	42	30	26	23	27

VENTS KSB

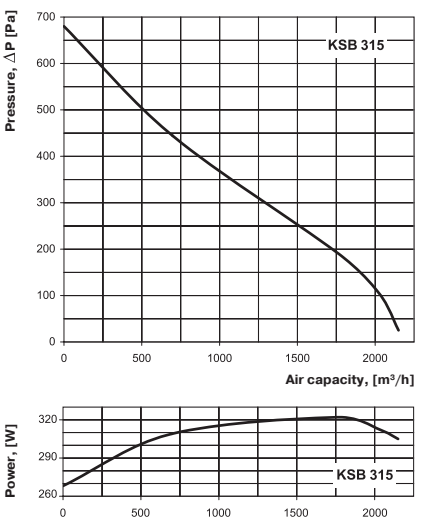

Sound-power level		Octave-frequency band [Hz]								
	Hz	Gen	63	125	250	500	1000	2000	4000	8000
L_{wA} to inlet	dBA	59	45	47	56	47	48	50	44	40
L_{wA} to outlet	dBA	75	52	51	59	68	68	65	62	54
L_{wA} to environment	dBA	48	41	41	44	43	36	28	32	29